

LED ultra-thin street lamp

Professional LED




PC lens
ultra-thin and durable
guaranteed for three years

AC85- 265V

AX-LD-FD2-150W

FIXED ROAD LAMP SERIES

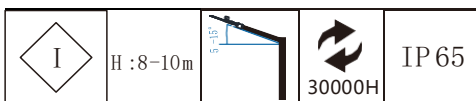

Features & Applicatino

- ◆ Adopt high-stability isolated constant current power supply scheme, it has the characteristics of over-temperature protection, wide voltage range, high power factor, high efficiency and good heat dissipation effect.
- ◆ SMD2835 patch light source is adopted
- ◆ Adopt high purity aluminum radiator with high thermal conductivity to maintain reasonable temperature.
- ◆ Stadium, stadium, workshop, warehouse and other




Product specifications

Input voltage	AC 100-265V ~ 50/60Hz	Size of Standard version model	860*320*80mm
Power	150W ±5%	Size of Carton	885*340*110mm
Light effect	90-100lm /W	Net weight	3.2kg
Luminous flux	13500-14250lm	THD	≤15%
lightemittingdiode	50*3pcs*COB	Insulation grade	Class I
Color temperature	6000k /4000k /3000k	Surge protection	4KV
Color rendering index	Ra > 80	InstallsW ay	Lam p post
Color tolerance adjustment	≤15SDCM		
Power factor (K/Z)	PF≥0.9		
IK/IP protectionlevel	IK08/IP65		
Working temperature	-25°C— +40°C		
Service life	30000 H		

Product size



Product size

Light-induced version model:

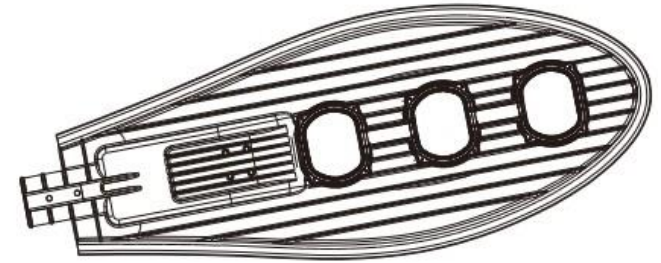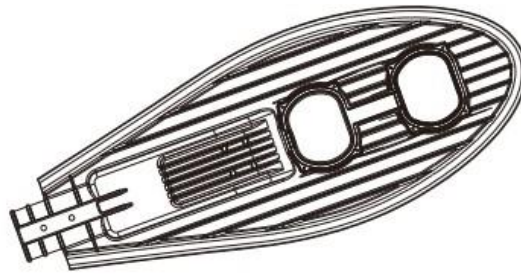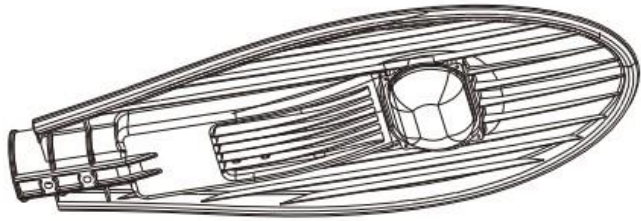


Installation Instruction

OFF

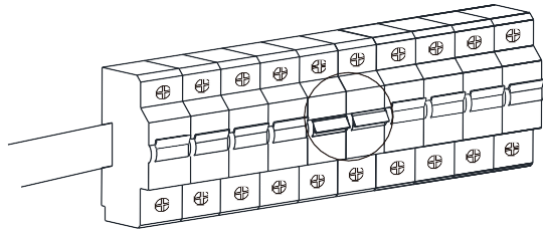


Turn off the power before installing the lamp

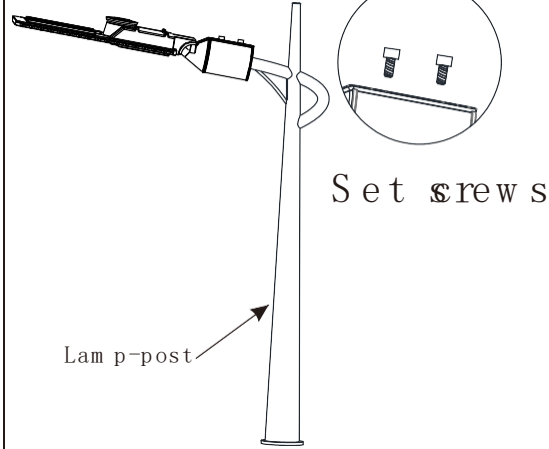



Lamp post

Set screws

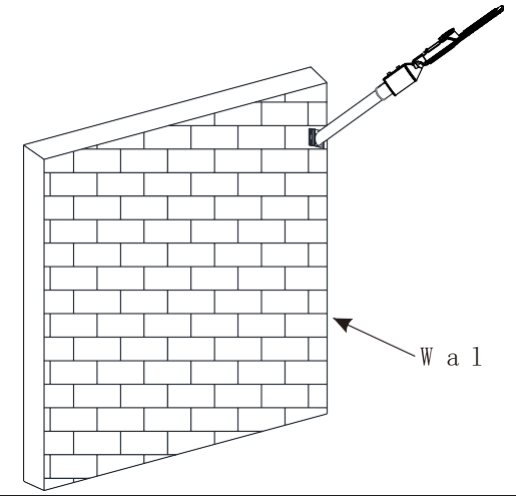

Wall


Adjust to the right angle

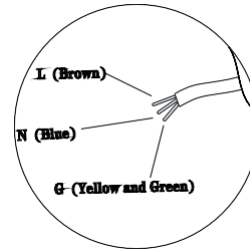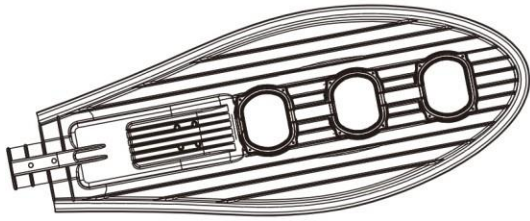



L (Brown)

N (Blue)

G (Yellow and Green)

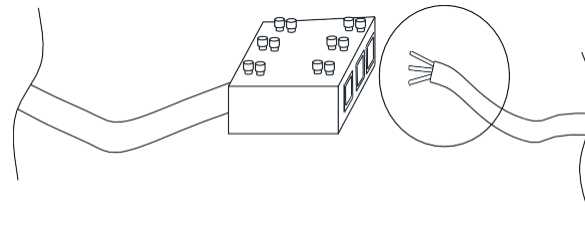

ON

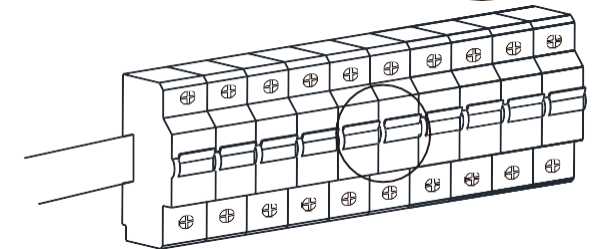

Please turn on the power after installation